

bodytone

LINEABOLD



LEG EXTENSION

INDOOR

MODEL **SR05-E**

**DIMENSIONS**

153 x 157 x 115cm

NET WEIGHT

175kg

WORK ZONE

Lower train.

GRIPS

Anodized ALUMINUM, knurled to improve grip.

BEARINGS

SKF 6205 2Z. Stainless steel. Double tapered roller bearing, housed in a closed, anti-play bushing, ensuring a constant direction of movement.

ADJUSTMENT LEVERS

Adjustable roller with 5 positions by pop-pin. Adjustable backrest with 4 positions by pop-pin and with chromed steel guide. Adjustment system by means of a single bolt, made of techno-polymer with a breaking index of 750 kg.

LOADING CAPACITY

310 mm supports for 6 Bodytone discs of 20 kg per arm (up to 240 kg for training).

AXES

10mm thick plates laser cut with another 10mm thick plate to reinforce, to achieve a smooth movement without gaps or twists produced by continuous use or load.

STRUCTURE

Steel tubes of 110 x 52 mm with 3 mm thickness. Welded in accordance with the UNE 10219 regulation, quality S-275-J0H. Enriched and optimized to maintain a constant section in the bending process, thus avoiding sensitive areas and minimizing the rate of breakage. Cold bending process, by means of a 4-roller system, avoiding any deformation in the process and maintaining the physical characteristics of the entire piece. Closed perimeter welding at structural points and connection plates.

PAINTING PROCESS

3 coats of paint. Pickled and stabilized steel by total immersion of the parts in different degreasing solutions to guarantee a perfect and complete cleaning of the base material. Anti-rust primer to ensure proper isolation of internal oxidation and good paint adhesion. 2 final coats of epoxy polyester powder paint, drying at 240°C.




LEG EXTENSIONINDOOR Highlights



**ADJUSTABLE SEAT IN VARIOUS
HEIGHTS**



**ROBUST AND FIRM STEEL
STRUCTURE**

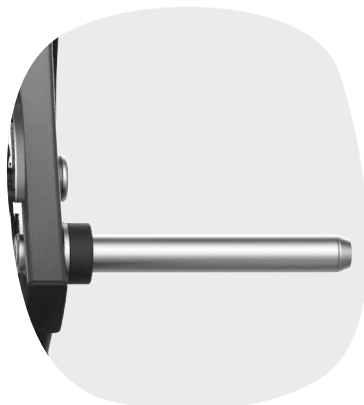

LOADING CAPACITY