

# bodytone

## LINEABOLD



## LEG EXTENSION OUTDOOR

MODEL **SR05-O**

**DIMENSIONS**

153 x 157 x 115cm

**NET WEIGHT**

175kg

**WORK ZONE**

Lower train.

**BASIS BASIS**

4 non-slip tips.

**GRIPS**

Anodized ALUMINUM, knurled to improve grip.

**BEARINGS**

SKF 6205 2Z. Stainless steel. Double tapered roller bearing, housed in a closed, anti-play bushing, ensuring a constant direction of movement.

**ADJUSTMENT LEVERS**

AISI 316 stainless steel seat post, special anti-corrosion in marine environments. Adjustable with 8 laser engraved positions. Adjustment system using a single bolt, made of technopolymer with a breakage rate of 750 kg.

**LOADING CAPACITY**

4 on each arm, 5 or 10 kg discs. (discs not included).

**AXES**

AISI 316 stainless steel machined shaft, austenitic steel more resistant to corrosion compared to class A2. Its support is made up of 10 mm thick plates cut by laser with another 10 mm thick plate to reinforce and achieve a smooth movement without gaps or twisting caused by continuous use or load.

## STRUCTURE

Steel tubes of 110 x 52 mm with 3 mm thickness. Welded in accordance with the UNE 10219 regulation, quality S-275-J0H. Enriched and optimized to maintain a constant section in the bending process, thus avoiding sensitive areas and minimizing the rate of breakage. Cold bending process, by means of a 4-roller system, avoiding any deformation in the process and maintaining the physical characteristics of the entire piece. Closed perimeter welding at structural points and connection plates.

## PAINTING PROCESS

5 coats of paint. 200 microns Steel pickled and stabilized by total immersion of the parts in different degreasing solutions to guarantee a perfect and complete cleaning of the base material. Zinc phosphate anti-rust primer to ensure proper isolation of internal oxidation and good paint adhesion. 3 final coats of epoxy polyester powder paint, special for exteriors, dried at 240oC. Superficial layer of protective polyester varnish.



# LEG EXTENSIONOUTDOOR


## Highlights



ADJUSTABLE SEAT IN VARIOUS  
HEIGHTS



ROBUST AND FIRM STEEL  
STRUCTURE

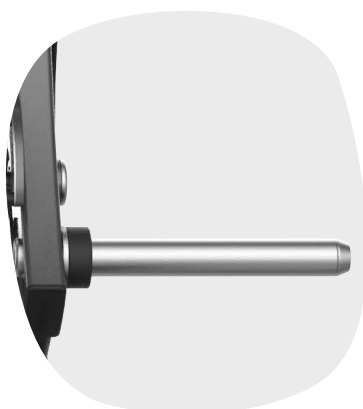

LOADING CAPACITY