
bodytone BOLDLINE





MODEL SR12-E

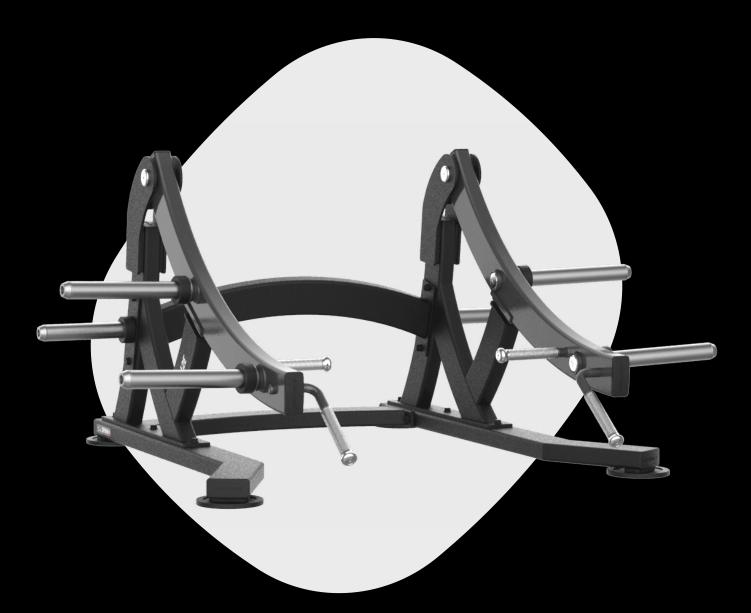

DIMENSIONS 174 x 156 x 87cm

NET WEIGHT 119kg

WORK ZONE Lower train.

BASIS BASIS 4 non-slip tips.

COMFORT AND EXTRAS Take guides to correctly perform the exercises.

SECURITY SYSTEM Adjustable safety stops at different heights.

GRIPS

Anodized ALUMINUM, knurled to improve grip.

LOADING CAPACITY

310 mm supports for 8 Bodytone 20 kg discs per arm (up to 280 kg for training).

ADJUSTMENT LEVERS

Adjustment system by means of a single bolt, made of techno-polymer with a breaking index of 750 kg.

BEARINGS

SKF double tapered roller bearing, housed in a closed, anti-backlash bushing, ensuring a constant direction of movement.

GRIPS

Double grip to facilitate different types and angles of exercise. Double disc support for heavier exercises. Anodized aluminum handle, knurled to improve grip.

AXES

10mm thick plates laser cut with another 10mm thick plate to reinforce, to achieve a smooth movement without gaps or twists produced by continuous use or load.

SQUATSINDOOR

STRUCTURE

Steel tubes of 110 x 52 mm with 3 mm thickness. Welded in accordance with the UNE 10219 regulation, quality S-275-J0H. Enriched and optimized to maintain a constant section in the bending process, thus avoiding sensitive areas and minimizing the rate of breakage. Cold bending process, by means of a 4-roller system, avoiding any deformation in the process and maintaining the physical characteristics of the entire piece. Closed perimeter welding at structural points and connection plates.

PAINTING PROCESS

3 coats of paint. Pickled and stabilized steel by total immersion of the parts in different degreasing solutions to guarantee a perfect and complete cleaning of the base material. Antirust primer to ensure proper isolation of internal oxidation and good paint adhesion. 2 final coats of epoxy polyester powder paint, drying at 240oC.



SQUATSINDOOR Highlights





ROBUST AND FIRM STEEL STRUCTURE