BODYTONE

USER MANUAL



SOLID ROCK

SR12E

! CAUTION

Read all precautions and instructions in this manual before using this equipment.

Table of Contents

Important Safety Instructions	2
Instructions	3
Parts List	4
Exploded View	5
Measurement Guide	6
Assembly Instructions	7
Assembly	8
Maintenance Schedule	10
General Maintenance Information	11
Weight Training Tips	12
Specifications	12

Important Safety Instructions

Before beginning any fitness program, you should obtain a complete physical examination from your physician. When using exercise equipment, basic precautions should always be taken, including the following:

- *Read all instructions before using the equipment. These instructions are written to ensure your safety and to protect the unit.
- *Do not allow children on or near the equipment.
- *Use the equipment only for its intended purpose as described in this guide. Do not use accessory attachments that are not recommended by the manufacturer: such attachments might cause injuries.
- *Wear proper exercise clothing and shoes for your workout---no loose clothing.
- *Be careful when getting on or off the equipment.
- *Do not overexert yourself or work to exhaustion.
- *If you feel any pain or abnormal symptoms, stop your workout immediately and consult your physician.
- *Never operate the unit when it has been dropped or damaged.
- *Never drop or insert anything into any opening in the equipment.
- *Always check the unit and its cables before each use. Make sure that all fasteners and cables are secure and in good working condition.
- *Frayed or worn cables can be dangerous and may cause injury. Periodically check these cables for any indication of wear.
- *Keep hands, limbs, loose clothing and long hair well out of the way of moving parts.
- *Do not attempt to lift more weight than you can control safely.
- *Do not use the equipment outdoors.

Personal Safety During Assembly

- *Read each step in the assembly instructions and follow the steps in sequence. Do not skip ahead. If you skip ahead, you may learn later that you have to disassemble components and that you may have damaged the equipment.
- *Assemble and operate the equipment on a solid, level surface. Locate the unit a few feet from walls or furniture to provide easy access. The equipment is designed for your enjoyment. By following these precautions and using common sense, you will have many safe and pleasurable hours of healthful exercise with the equipment.

Instructions

Before beginning assembly please take the time to read instructions thoroughly. Please use the various lists in this manual to make sure that all parts have been included in your carton. When ordering, use part number and description from the lists. Use only our replacement part when servicing. Failure to do so will void your warranty and could result in personal injury.

The equipment is designed to provide the smoothest, most effective exercise motion possible. After assembly, you should check all functions to ensure correct operation. If you experience problems, first recheck the assembly instructions to locate any possible errors made during assembly. If you are unable to correct the problem, call your authorized dealer. Be sure to have your serial number and this manual when calling. When all parts have been accounted for, continue on.


Tools Required



Punch Wrench



Wrench



Rubber Mallet




Hex Key Wrench Set

Parts List


Note: some of these parts may come pre-installed.


ITEM	DESCRIPTION	QTY	ITEM	DESCRIPTION	
NO.			NO.		
1	Left Bottom Frame Assembly	1	5.5	Tube End Cap 50×110R	2
1.1	Left Bottom Frame	1	5.6	Deep Groove Bearing 6205ZZ	2
1.2	Grounded Rubber Pad	2	5.7	Flat Head Cap Screw M10×25	2
1.3	Tube End Cap 50×110R	2	5.8	Flat Head Cap Screw M6×12	2
1.4	Flat Hex Nut M12	5	5.9	Flat End Cap Screw M6×12	2
1.5	Serial Plate	1	6	Bottom Connection Frame Assembly	1
1.6	Rivet 3×12	2	7	Upper Connection Frame Assembly	1
2	Right Bottom Frame Assembly	1	8	Upper Barbell Support Frame Assembly	4
2.1	Right Bottom Frame	1	8.1	Upper Barbell Support Frame	1
2.2	Grounded Rubber Pad	2	8.2	Tapered End Cap	1
2.3	Tube End Cap 50×110R	2	8.3	Rubber Sleeve A	1
2.4	Flat Hex Nut M12	5	8.4	Button Head Cap Bolt M8×40	1
3	Vertical Frame Assembly	2	8.5	Flat Washer Φ8.5×Φ16×1.5	1
3.1	Vertical Frame	1	8.6	Plum Blossom Shrapnel	1
3.2	Tube End Cap 50×110R	1	9	Short Barbell Support Frame Assembly	
4	Left Arm Frame Assembly	1	9.1	Short Barbell Support Frame	1
4.1	Left Arm Frame	1	9.2	Rubber Sleeve A	
4.2	Handle	2	9.3	Tapered End Cap	
4.3	Handle End Cap	2	9.4	Button Head Cap Bolt M8×40	
4.4	Buffer Block	1	9.5	Flat Washer Φ8.5×Φ16×1.5	
4.5	Tube End Cap 50×110R	2	9.6	Plum Blossom Shrapnel	
4.6	Deep Groove Bearing 6205ZZ	2	10	Bearing Rotating Shaft	
4.7	Flat Head Cap Screw M10×25	2	11	Ф50 Decorative Cap	
4.8	Flat Head Cap Screw M6×12	2	12	Flat Washer Φ13×Φ24×2	
4.9	Flat End Cap Screw M6×12	2	13	Spring Washer Φ12	10
5	Right Arm Frame Assembly	1	14	Flat Head Cap Screw M8×35	4
5.1	Right Arm Frame	1	15	Flat Head Cap Screw M10×25	4
5.2	Handle	2	16	Hex Bolt M12X35	10
5.3	Handle End Cap	2	17	Hex Bolt M12X80	4
5.4	Buffer Block	1	18	Nut M12	4

Exploded View

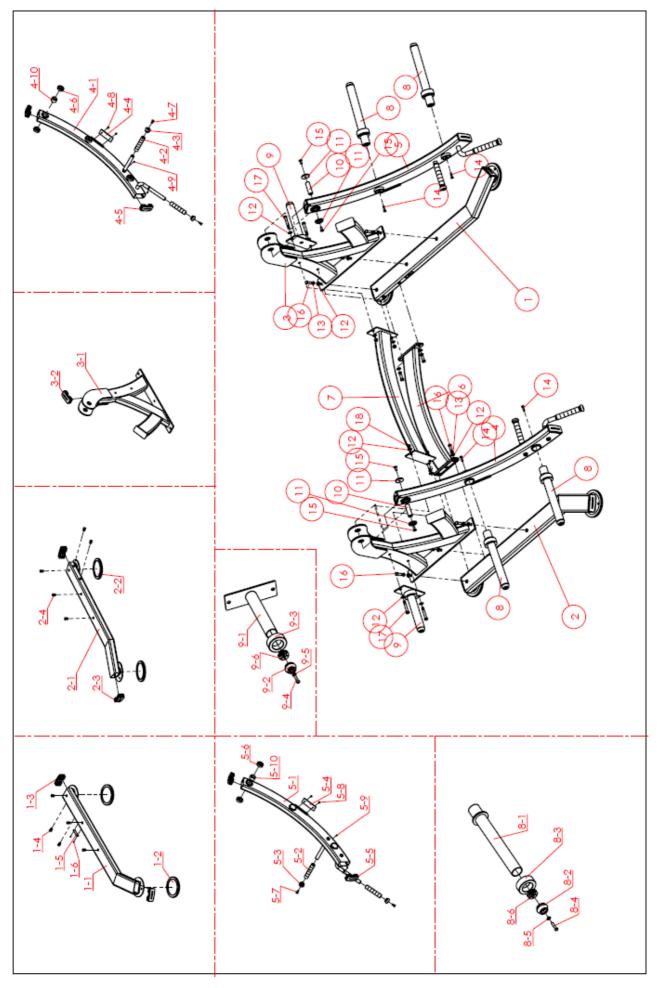

Measurement Guide

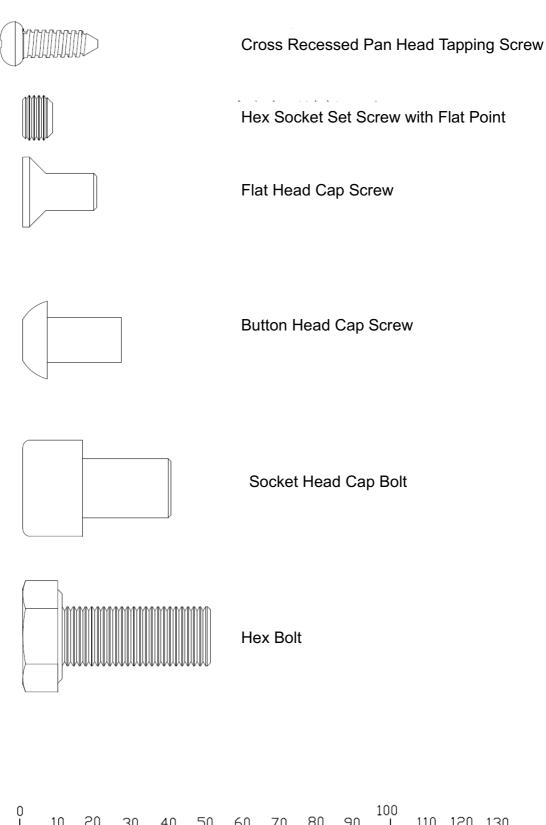

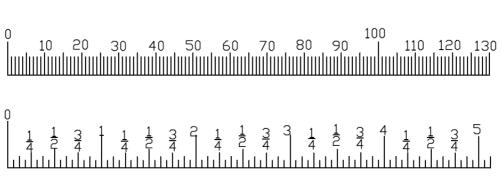

Assembly Instructions

Assembly of the equipment takes professional installers about 2 hours. If this is the first time you have assembled this type of equipment, plan to spend more time. It is strongly recommended to assembly the equipment by professional installers. You may find it quicker, safer, and easier to assemble this equipment with the help of a friend, as some of components may be large, heavy or awkward to handle alone. It is important that you assemble your product in a clean, clear, uncluttered area. This will enable you to move around the product while you are fitting components and reduce the possibility of injury during assembly.

Note: As with any assembled part, proper alignment and adjustment is critical. While tightening the fasteners, be sure to leave room for adjustments. Do not fully tighten the fasteners until instructed to do so. Be careful to assemble the components in the sequence presented in this guide.

Assembly

Step 1

- 1. Attach Left Bottom Frame Assembly (#1) and Right Bottom Frame Assembly (#2) to Bottom Connection Frame Assembly (#6) using:
 - 4 X Hex Bolt M12X35 (#16)

4 X Flat Washer Φ13×Φ24×2 (#12)


- 4 X Spring Washer Φ12 (#13)
- 2. Attach 2 Vertical Frame Assembly (#3) to Left Bottom Frame Assembly (#1) and Right Bottom Frame Assembly (#2) using:
 - 6 X Hex Bolt M12X35 (#16)

6 X Flat Washer Φ13×Φ24×2 (#12)

- 6 X Spring Washer Φ12 (#13)
- 3. Attach Upper Connection Frame Assembly (#7) and 2 Short Barbell Support Frame Assembly (#9) to Vertical Frame Assembly (#3) using:
 - 4 X Hex Bolt M12X80 (#17)

8 X Flat Washer Φ13×Φ24×2 (#12)

4 X Nut M12 (#18)

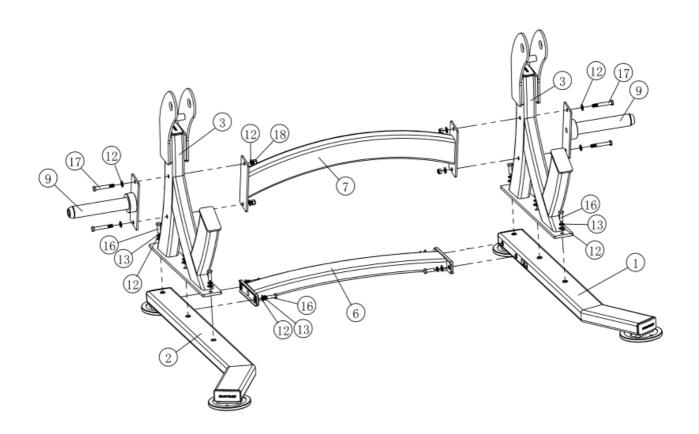

Step 2


- 1. Attach Left Arm Frame Assembly (#4) to the left Vertical Frame Assembly (#3) using:
 - 1 X Bearing Rotating Shaft (#10)

2 X ⊕50 Decorative Cap (#11)

- 2 X Flat Head Cap Screw M10×25 (#15)
- 2. Attach Right Arm Frame Assembly (#5) to the right Vertical Frame Assembly (#3) using:
 - 1 X Bearing Rotating Shaft (#10)

2 X Φ50 Decorative Cap (#11)

- 2 X Flat Head Cap Screw M10×25 (#15)
- 3. Attach 4 Upper Barbell Support Frame Assembly (#8) to Left Arm Frame Assembly (#4) and Right Arm Frame Assembly (#5) using:
 - 4 X Flat Head Cap Screw M8×35 (#14)

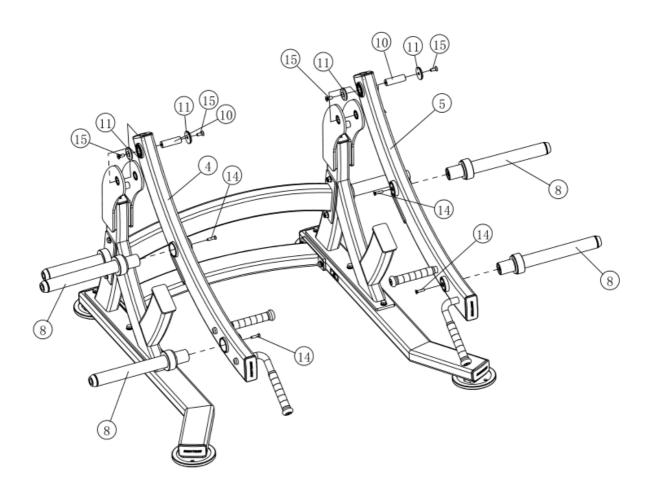

Maintenance Schedule

ROUTINE	COMMERCIAL MAINTENANCE	HOME MAINTEMANCE	LATEST DATE ENTRY	
Inspect: Links, Pull Pins, Snap Locks, Swivels, Weight Stack Pins	DAILY	WEEKLY		
Clean: Upholstery	DAILY	WEEKLY		
Inspect: Cables or Belts and their tension	DAILY	WEEKLY		
Inspect: Accessory Bars, and Handles	WEEKLY	3 MONTHS		
Inspect: All Decals	WEEKLY	3 MONTHS		
Inspect: All Nuts and Bolts, Tighten if needed	WEEKLY	3 MONTHS		
Inspect:Anti-skid Surface	WEEKLY	3 MONTHS		
Clean&Lubricate: Guide rods with a Teflon(PTFE) based lubricant(Superlube)	MONTHS	3 MONTHS		
Lubricate: Seat Sleeves, Turcite Bushings, Linear Bearing	MONTHS	3 MONTHS		
Clean and Wax: All Glossy Finishes	6 MONTHS	YEARLY		
Repack with Grease: Linear Bearings	6 MONTHS	YEARLY		
Replace: Cables, Belts and Connecting Parts	YEARLY	3 YEARS		

General Maintenance Information

Links, Pull-Pins, Snap Hooks, Swivels, Weight Stack Pins:

- *Check all pieces for signs of visible wear or damage.
- *Check springs in snap hooks and pull-pins for proper tension and alignment.
- *If the spring sticks or has lost its rigidity, replace it immediately.

Upholstery:

- *To ensure prolonged upholstery life and proper hygiene, all upholstered pads should be wiped down with a damp cloth after every workout.
- *Periodically take the time to use a mild soap or approved vinyl upholstery cleaner to deter the onset of cracking or drying. Avoid using any abrasive cleaners or cleaners not intended for use on vinyl.
- *Replace ripped or worn upholstery immediately.
- *Keep sharp or pointed objects clear of all upholstery.

Decals:

*Inspect and familiarize yourself with any safety warnings or other user information posted on each decal.

Nuts and Bolts:

- *Inspect all nuts and bolts for any loosening and tighten if needed.
- *Go through a re-tightening sequence periodically to ensure that all hardware is tensioned proper.

Anti-Skid Surfaces:

*These surfaces are designed to supply secure footing and need to be replaced if they appear worn or become slippery.

Belts and Cables:

- *We use only high quality belt, and mil-spec cables.
- *Visually inspect the belts and cables for fraying, cracking, peeling or discoloration.
- *While the machine is not in use, carefully run your fingers along the belt or cable to feel for thinning or bulging areas.
- *Replace belts and cables immediately at the first signs of damage or wear. Do not use equipment until belts or cables have been replaced.

Belt and Cable Tensions:

- *Referring to the Owner's Manual, when belts or cables are used check all bolts attachment to be sure they are properly attached.
- *Check slack in cables and re-adjust cable tension if needed.

Seat Sleeves, Guide Rods:

- *Wipe down adjusting tubes with a dust free rag before applying lubricant.
- *Lubricate seat sleeves and Guide Rods with silicon or Teflon based lubricant spray.

Linear Bearings:

*Referring to the owner's manual carefully disassembly the bearing from its housing and place a finger full of light grease (lithium, super lube, etc) into the inside of the bearing. Use your finger, press the grease into the ball-bearings and their tracks. Repeat until the ball-bearing tracks are full

of grease. Insert the shaft back into the bearing and wipe off excess grease.

Weight Training Tips

Use this manual to guide you through the basic exercises you can perform on your equipment. To gain maximum results and avoid possible injury, consult a fitness professional to develop your

complete exercise program.

Always consult your physician before starting any exercise program.

To be successful in your exercise program, it is important to develop an understanding of the

basic principles of strength training. Now that you have your equipment, it is only natural that you want to get started immediately. First, determine a set of realistic goals and objectives for yourself. By deciding on an exercise plan that is right for you prior to starting, you will contribute significantly

to your success.

Warm up properly before engaging in weight resistance training. Stretching, yoga, jogging,

calisthenics or other cardiovascular exercise can help prepare your body for the heavier workload

of lifting weights.

Learn how to perform the exercise correctly before using heavy weight. Correct form is

important to avoid injury and to ensure that you work the proper muscle groups.

Know your limitations. If you are new to weight training or are embarking on an exercise

regimen after a long layoff, start slowly and build foundational strength over a longer period of time.

Pay attention to your breathing. Exhale when you exert is a general rule of thumb. Never hold

your breath.

Specifications

Class: S

Maximum Load of Trainer: 150Kgs/330Lbs

- 12 -

